



CD177-4
RETAINING NUT
SEE NOTE 3

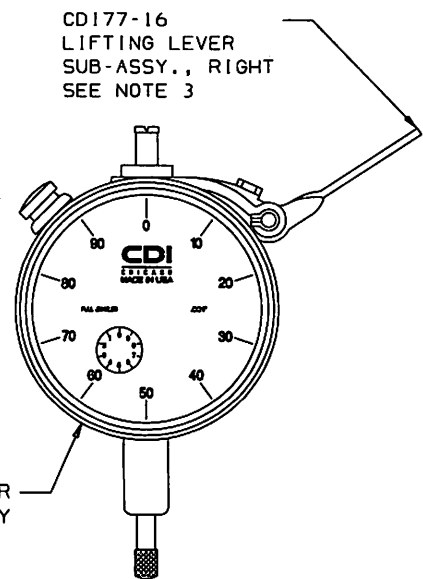

R.H. FRONT VIEW

ALTERNATE

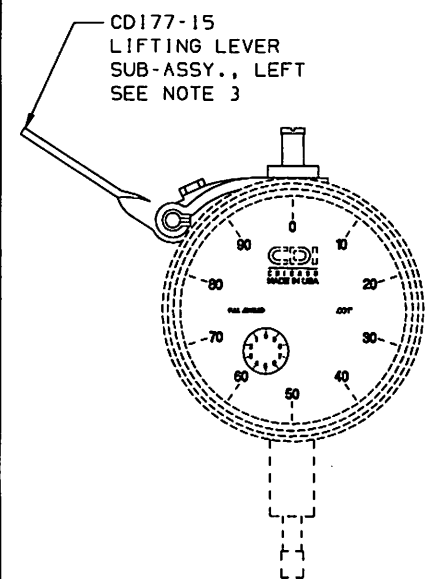

L.H. FRONT VIEW

NOTE:

1. REMOVE DUST CAP FROM TOP OF CASE.
2. REPLACE RACK SCREW WITH RACK EXTENSION FROM LIFTING LEVER KIT. (HOLD RACK IN PLACE WHEN REMOVING SCREW OR RACK MAY SLIP INTO CASE AND DISENGAGE FROM MOVEMENT.)
 - DO NOT OVERTIGHTEN EXTENSION.
3. INSTALL LIFT LEVER SUB-ASSEMBLY OVER TOP STEM AND HOLD IN PLACE WITH SQUARE NUT FROM KIT. TIGHTEN NUT WITH LIFT LEVER SUB-ASSEMBLY IN POSITION SHOWN.
 - POSITION ON RIGHT OR LEFT SIDE OF TOP STEM (AS SHOWN).
4. ASSEMBLE LIFT LEVER BRACKET TO RACK EXTENSION WITH RACK SCREW. LIFT LEVER BRACKET SHOULD BE ADJUSTED TO A POSITION POINTING TO BACK OF GAGE AND TIGHTENED IN PLACE TO GIVE FULL TRAVEL OF GAGE.
5. LIFT LEVER SHOULD MOVE FREELY AND LIFT SPINDLE UP EASILY.
6. PLACE ALL INDIVIDUAL PARTS IN A PLASTIC BAG FOR SHIPMENT.

LIFT LEVER CONSISTS OF 5 INDIVIDUAL PARTS AND/OR SUBASSEMBLIES.